



28.6×10.1×12.6

NT74L

Features

- Latching relay.
- Small size and light weight.
- 10A switching capability.
- PC board mounting.

Ordering Information

NT74L **C** **S** **DC12V** **D** **R** **G**
1 2 3 4 5 6 7

- 1 Part number: NT74L
2 Contact arrangement: A:1A; C:1C
3 Enclosure: S:Wash tight; Z:Flux proof
4 Coil rated voltage(V): DC:3,5,9,12,24
- 5 Coil: NIL:Single coil; D:Double coils
6 Polarity: Nil:Standard; R:Reverse polarity
7 Contact plating: NIL:Standard; G:Gold plated

Contact Data

Contact Arrangement	1A(SPSTNO) 1C(SPDT(B-M))	
Contact Material	AgSnO ₂	
Contact Rating(Resistive)	NO:10A/250VAC,24VDC NC:8A/250VAC,24VDC	
Max. Switching Power	240W 2500VA	
Max. Switching Voltage	150VDC 400VAC	Max. Switching Current:10A
Contact Resistance	≤100mΩ	Item 4.12 of IEC61810-7
Electrical Endurance	5×10 ⁴	Item 4.30 of IEC 61810-7
Mechanical Endurance	5×10 ⁶	Item 4.31 of IEC 61810-7

Coil Parameter

Coil voltage VDC	Coil resistance Ω ± 10%	Set/Reset voltage VDC (70% of rated voltage)	Pulse duration ms	Coil power W	Set time ms	Reset time ms
1 Coil						
3	36	2.1	≥30	0.25	≤10	≤10
5	100	3.5				
9	324	6.3				
12	576	8.4				
24	2300	16.8				
2 Coils						
3	2×19	2.1	≥30	2×0.48	≤10	≤10
5	2×52	3.5				
9	2×169	6.3				
12	2×300	8.4				
24	2×1200	16.8				


- Notes:** 1.When latching relays are installed in equipment, the latch and reset coil should not be powered simultaneously. Coil should not be pulsed with less than the nominal coil voltage and pulse width should be a minimum of three times the specified operate time of the relay. If these conditions are not followed, it is possible for the relay to be in the magnetically neutral position .
- 2.Switching voltage is for test purpose only and are no to be used as design criteria.

Characteristics


Insulation Resistance	1000M Ω min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Open Contacts Between Contact and Coil	1000VAC 1min 5000VAC 1min	Item 4.9 of IEC 61810-7
Shock Resistance	Functional:98m/s ² Destructive:980m/s ²	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.65mm	Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40℃~85℃	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Weight (Approx.)	8g	Item 4.7 of IEC 61810-7

Dimensions


mm

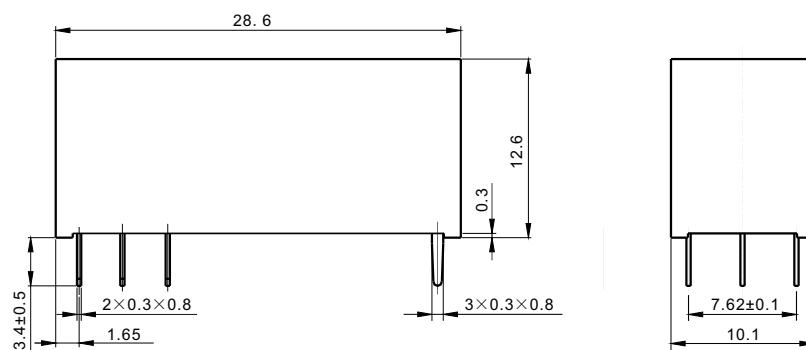

Dimension

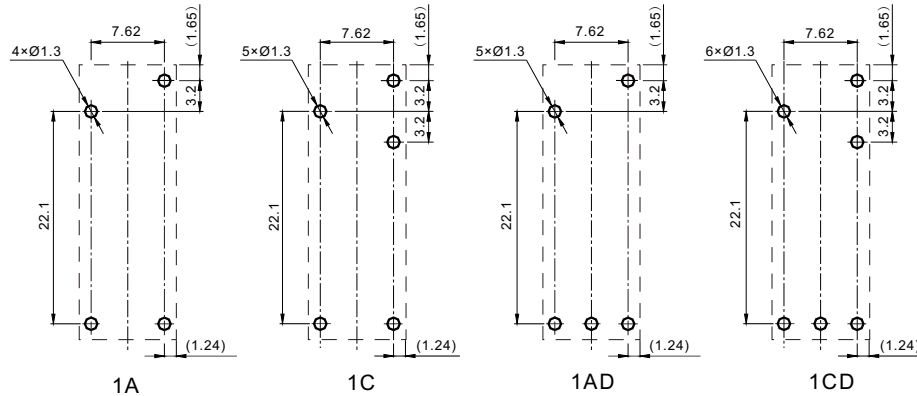

Mounting (Bottom view)

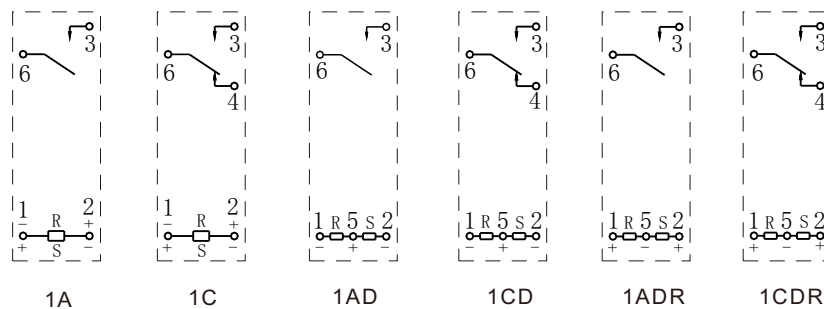

S:Set
R:Reset

Wiring diagram (Bottom view)

Remark: In case of no tolerance shown in outline dimension: outline dimension≤1mm,tolerance should be ±0.2mm ;
outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.