



- Small size, light weight.
- Low coil consumption.
- PC board mounting.
- Suitable for household electrical appliances, automobile system, window, wipe motor, hours, doorlock.

<u>NG8QN</u>	<u>C</u>	<u>S</u>	<u>DC12V</u>	<u>0.69</u>
1	2	3	4	5

1 Part number: NG8QN, NG8QW	4 Coil rated voltage(V): DC:12
2 Contact arrangement: C:1C(NG8QN) 2C:2C(NG8QW)(Twin)	5 Coil power: 0.69:0.69W
3 Enclosure: S: Wash tight: NIL: Flux proof	

Contact Arrangement	1C(SPDT(B-M)) 2C(Twin)	
Contact Material	AgSnO <sub>2</sub>	
Contact Rating	NO:20A/14VDC; NC:15A/14VDC Inrush current 25A (L/R=7ms; 15ms max)	
Max. Switching Power	280W	
Max. Switching Voltage	16VDC	Max. Switching Current:30A
Voltage Drop(Initial)	Typ.: 50mV(at 10A)	Item 4.12 of IEC 61810-7
Electrical Endurance	$1 \times 10^5$	Item 4.30 of IEC 61810-7
Mechanical Endurance	$1 \times 10^7$	Item 4.31 of IEC 61810-7

Coil voltage VDC		Coil resistance $\Omega \pm 10\%$	Pick-up voltage VDC(max)	Drop-out voltage VDC(min)	Coil power W	Operate time ms	Release time ms
Rated	Max.						
12	16	210	7.3	0.9	0.69	$\leq 10$	$\leq 5$
			9.0(at 80℃)				



**Notes:** 1. The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
2. Pick-up and drop-out voltage are for test purposes only and are not to be used as design criteria.

## Characteristics

Insulation Resistance	100MΩ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Open Contacts Between Contact and Coil	500VAC 1min 500VAC 1min	Item 4.9 of IEC 61810-7
Shock Resistance	98m/s <sup>2</sup> 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	5N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40℃~105℃	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Weight (Approx.)	6g (NG8QN); 11g (NG8QW)	Item 4.7 of IEC 61810-7


## Dimensions

mm

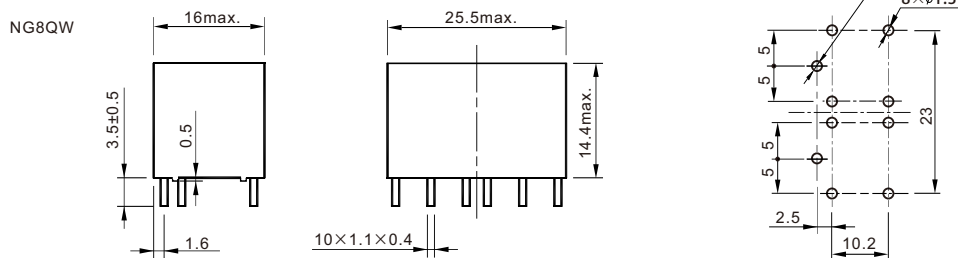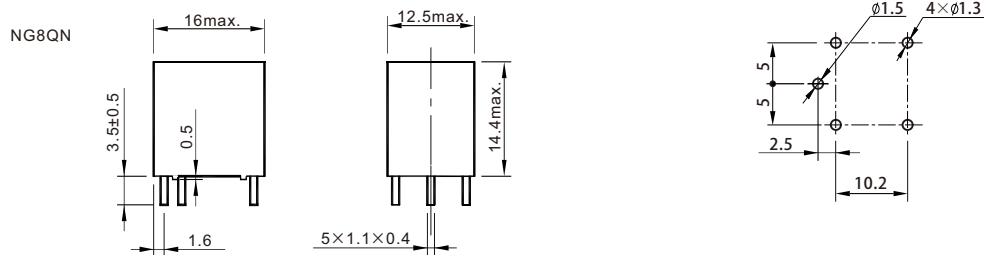

Dimensions

Mounting (Bottom view)

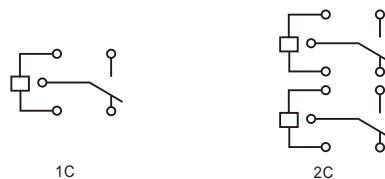

Wiring diagram(Bottom view)

**Remark:** In case of no tolerance shown in outline dimension: outline dimension≤1mm,tolerance should be ±0.2mm ;  
outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.