



22 × 16.2 × 20.8

# JZC-22F<sub>4</sub>

UL E160644

R50631259

CEC 25002479307

## Features

- Small size, light weight , low coil power consumption.
- Switching capacity can reach 32A/277VAC.
- High dielectric strength.
- Contact gap ≥ 2.1mm.
- PC board mounting is available.
- High-performance power relay, suitable for photovoltaic systems (solar-inverters), automotive applications, motor control, compressor control, and home appliances.

## Ordering Information

**JZC-22F<sub>4</sub>**   **F**   **A**   **32**   **T**   **12VDC**   **F**

|   |   |
|---|---|
| 1 Part number: JZC-22F <sub>4</sub>       | 4 Contact rating: 32:32A/277VAC           |
| 2 Enclosure: S: Wash tight; F: Flux proof | 5 Coil power: T:2.8W; H:1.67W; L:1.2W     |
| 3 Contact arrangement: A:1A               | 6 Coil rated voltage(V): DC:5,9,12,24,48  |
|   | 7 Resist heat class: NIL:Standard; F:155℃ |

## Contact Data

|                                 |   |                            |
|---------------------------------|---|----------------------------|
| Contact Arrangement             | 1A(SPSTNO)  |                            |
| Contact Material                | AgSnO <sub>2</sub>                                      |                            |
| Contact Rating                  | 32A/277VAC  |                            |
| Holding voltage <sup>1)2)</sup> | 40%-50%Uc(1.2W/1.67W)<br>32%-36%Uc(2.8W)                |                            |
| Max. Switching Power            | 8864VA  |                            |
| Max. Switching Voltage          | 400VAC  | Max. Switching Current:32A |
| Contact Resistance              | ≤100mΩ  | Item 4.12 of IEC 61810-7   |
| Electrical Endurance            | 1 × 10 <sup>4</sup><br>1 × 10 <sup>4</sup> (1.67W 105℃) | Item 4.30 of IEC 61810-7   |
| Mechanical Endurance            | 5 × 10 <sup>5</sup>                                     | Item 4.31 of IEC 61810-7   |

**Notes:** 1)The coil holding voltage is the voltage value after the rated voltage is applied to the coil for 200ms.  
2)To apply higher holding voltage than specified during long time is forbidden to prevent overheating.

## Coil Parameter

| Coil voltage<br>VDC |      | Coil resistance<br>Ω ± 10% | Pick-up<br>voltage<br>VDC(max)<br>(80%of rated<br>voltage ) | Drop-out<br>voltage<br>VDC(min)<br>(5% of rated<br>voltage) | Coil<br>power<br>W | Operate<br>time<br>ms | Release<br>time<br>ms |
|---------------------|------|----------------------------|---|---|--------------------|-----------------------|-----------------------|
| Rated               | Max. |                            |   |   |                    |                       |                       |
| 9                   | 10.8 | 28.9                       | 7.2   | 0.45  | 2.8                | ≤15                   | ≤10                   |
| 12                  | 14.4 | 51.4                       | 9.6   | 0.6   |                    |                       |                       |
| 24                  | 28.8 | 205.7                      | 19.2  | 1.2   |                    |                       |                       |
| 5                   | 6    | 15                         | 4   | 0.25  | 1.67               | ≤15                   | ≤10                   |
| 9                   | 10.8 | 48.5                       | 7.2   | 0.45  |                    |                       |                       |
| 12                  | 14.4 | 86.2                       | 9.6   | 0.6   |                    |                       |                       |
| 24                  | 28.8 | 344.9                      | 19.2  | 1.2   |                    |                       |                       |
| 48                  | 57.6 | 1379.6                     | 38.4  | 2.4   |                    |                       |                       |
| 5                   | 6.5  | 20.8                       | 4   | 0.25  | 1.2                | ≤15                   | ≤10                   |
| 9                   | 10.8 | 67.5                       | 7.2   | 0.45  |                    |                       |                       |
| 12                  | 14.4 | 120                        | 9.6   | 0.6   |                    |                       |                       |
| 24                  | 28.8 | 480                        | 19.2  | 1.2   |                    |                       |                       |
| 48                  | 57.6 | 1920                       | 38.4  | 2.4   |                    |                       |                       |

**Notes:** 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
2.Apply 100%-120% of the rated coil voltage for 200ms in order for the relay to operate correctly.

## Characteristics


|   |                                  |                          |
|---|----------------------------------|--------------------------|
| Insulation Resistance   | 1000MΩ min (at 500VDC)           | Item 4.11 of IEC 61810-7 |
| Dielectric Strength<br>Between Contacts<br>Between Contact and Coil | 2000VAC 1min<br>4000VAC 1min     | Item 4.9 of IEC 61810-7  |
| Shock Resistance  | Functional: 98m/s <sup>2</sup>   | Item 4.26 of IEC 61810-7 |
|   | Destructive: 980m/s <sup>2</sup> | Item 4.26 of IEC 61810-7 |
| Vibration Resistance  | 10Hz~55Hz Double amplitude 1.5mm | Item 4.28 of IEC 61810-7 |
| Terminals Strength  | 10N                              | Item 4.24 of IEC 61810-7 |
| Ambient Temperature   | -40℃~105℃                        |                          |
| Relative Humidity   | 5% to 85%                        | Item 4.16 of IEC 61810-7 |
| Weight (Approx.)  | 16g                              | Item 4.7 of IEC61810-7   |

## Safety Approvals


| Safety approval | UL&CUR            | TüV               | CQC               |
|-----------------|-------------------|-------------------|-------------------|
| Load            | 32A/277VAC,250VAC | 32A/277VAC,250VAC | 32A/277VAC,250VAC |

## Dimensions


mm

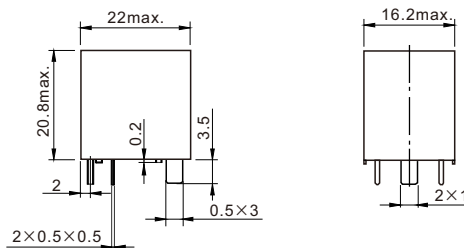

Dimensions



Mounting(Bottom view)



Wiring diagram (Bottom view)

**Remark:** In case of no tolerance shown in outline dimension: outline dimension≤1mm,tolerance should be ±0.2mm ;  
outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.